


# Himalaya G10 Series 580-600W

144-cell Bifacial HJT Half Cell  
Double-glass Solar Module

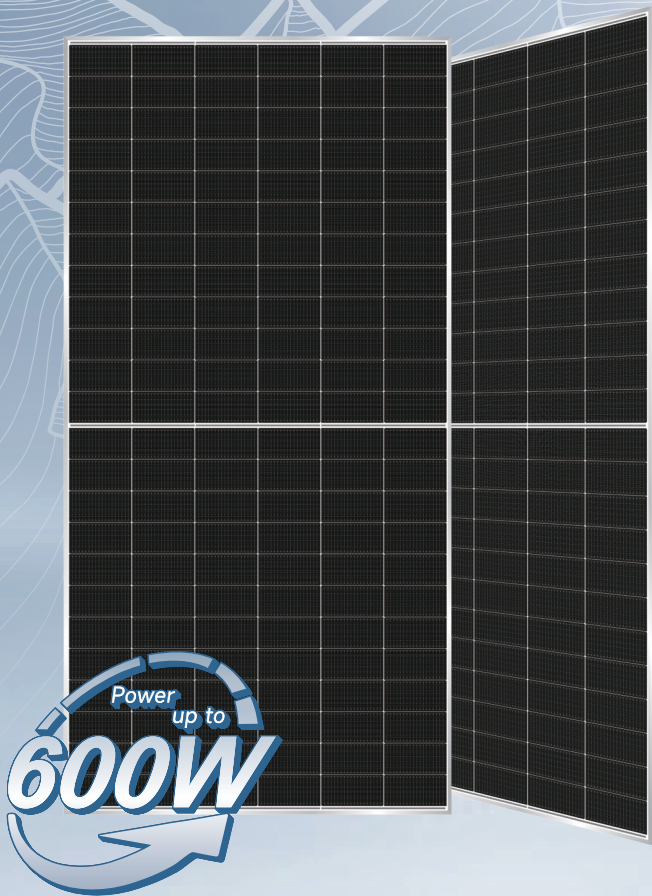

### HJT 3.0

Combining gettering process and double-sided  $\mu\text{-Si}$  to maximize cell efficiency and module power.



### -0.26%/ $^{\circ}\text{C}$ Pmax temperature coefficient

More stable power generation performance and even better in hot climate.



### Small Chamfer Design

Bigger power generation area on the solar cell, increasing 1% cell power of single piece.



### SMBB design with Half-Cut Technology

Shorter current transmission distance, less resistive loss and higher cell efficiency.



### Up to 90% Bifaciality

Natural symmetrical bifacial structure bringing more energy yield from the backside.



### Sealing with PIB based sealant

Stronger water resistance, greater air impermeability to extend module lifespan.



### Higher reliability

Industrial leading product and performance warranty, ensuring modules' consistent outstanding performance.



### Suitable for Utility Solar projects

## WARRANTY

Product  
Warranty **15**  
years

Linear  
Power  
Warranty **30**  
years




# Himalaya G10 Series 580-600W

## 144-cell Bifacial HJT Half Cell Solar Module



### Engineering Drawings

Unit: mm

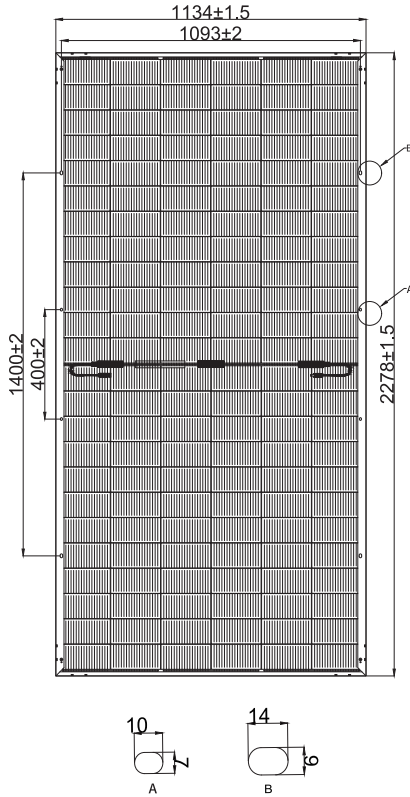

### Electrical Characteristics (STC\*)

HS-182-B144	DS580	DS585	DS590	DS595	DS600
Maximum Power (P <sub>max</sub> )	580W	585W	590W	595W	600W
Module Efficiency (%)	22.45%	22.65%	22.84%	23.03%	23.23%
Optimum Operating Voltage (V <sub>mp</sub> )	45.00V	45.21V	45.42V	45.63V	45.84V
Optimum Operating Current (I <sub>mp</sub> )	12.89A	12.94A	12.99A	13.04A	13.09A
Open Circuit Voltage (V <sub>oc</sub> )	53.42V	53.62V	53.81V	54.00V	54.20V
Short Circuit Current (I <sub>sc</sub> )	13.35A	13.40A	13.45A	13.50A	13.55A
Operating Module Temperature	-40 to +85 °C				
Maximum System Voltage	DC1500V (IEC)				
Maximum Series Fuse	25A				
Power Tolerance	0~+5W				
Bifaciality	85% ± 5%				

\*STC: Irradiance 1000 W/m<sup>2</sup>, cell temperature 25 °C, AM=1.5. Tolerance of P<sub>max</sub> is within +/- 3%.

### BSTC\*\*

Maximum Power (P <sub>max</sub> )	640W	645W	650W	655W	660W
Optimum Operating Voltage (V <sub>mp</sub> )	45.00V	45.21V	45.42V	45.63V	45.84V
Optimum Operating Current (I <sub>mp</sub> )	14.23A	14.27A	14.32A	14.36A	14.40A
Open Circuit Voltage (V <sub>oc</sub> )	53.42V	53.62V	53.81V	54.00V	54.20V
Short Circuit Current (I <sub>sc</sub> )	14.73A	14.77A	14.82A	14.86A	14.90A

\*\*BSTC: Front side irradiation 1000W/m<sup>2</sup>, back side reflection irradiation 135W/m<sup>2</sup>, AM=1.5, ambient temperature 25 °C.


### Temperature Characteristics

Nominal Operating Cell Temp. (NOCT)	44 °C ± 2 °C
Temperature Coefficient of P <sub>max</sub>	-0.26%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.24%/°C
Temperature Coefficient of I <sub>sc</sub>	0.04%/°C

### Safety & Warranty

Safety Class	Class II
Product Warranty	15 yrs Workmanship
Performance Warranty	30 yrs Linear Warranty*

\* Less than 1% attenuation in the 1st year, the annual attenuation from the 2nd year is no more than 0.375%, and the power is no less than 88% until the 30th year.

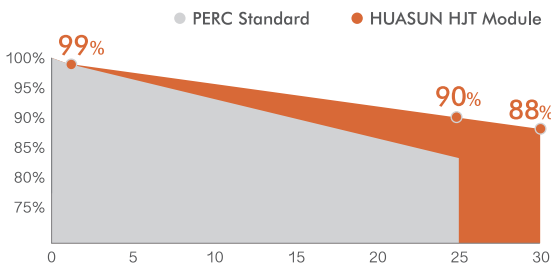

\* Refer to HUASUN standard warranty for details

### Mechanical Characteristics

Cell Type	HJT Mono 182 × 91.75mm
Cell Connection	144 (6 × 24)
Module Dimension	2278 × 1134 × 30 mm
Weight	32 kg
Junction Box	IP68
Output Cable	4mm <sup>2</sup> , 300mm in length, length can be customized / UV resistant
Connectors Type	MC4 original / MC4 compatible
Frame	Anodised aluminum alloy
Encapsulant	EPE
Front Load	5400 Pa
Rear Load	2400 Pa
Glass Thickness	(F) 2.0mm anti-reflective solar glass   (B) 2.0mm solar glass

### Shipping Configurations

Container Size	HC
Pallets Per Container	20
Modules Per Pallet (pcs)	36
Modules Per Container (pcs)	720

### ANHUI HUASUN ENERGY CO., LTD.

HS-182-B144DS-V202301 © Anhui Huasun Energy Co., Ltd. reserves all rights.

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China

Tel: 0086-563-3318095 www.huasunsolar.com

sales@huasunsolar.com customerservice@huasunsolar.com