



T SERIES (G3)

3-PHASE INVERTERS

The T Series inverter range is aimed at 3-phase domestic and small-scale commercial installations, offering unrivalled performance and versatility for increased yield potential and longer generation windows. The 3-phase T Series inverter options range from 3kW to 25kW.

REFINED – POWERFUL – FLEXIBLE



High Performance

Low start-up voltage, wide voltage range, 98.6% maximum efficiency



Easy Installation

Flexible configuration, plug and play set-up.



IP65 Rated

Engineered to last with maximum flexibility. Suitable for outdoor installation.



Remote Monitoring


Monitor your system remotely via smartphone app or web portal.

ANYTIME, ANYWHERE REMOTE MONITORING PLATFORM

Monitor system performance in real-time via smartphone app or web portal using our advanced monitoring platform.



THE T SERIES (G3)

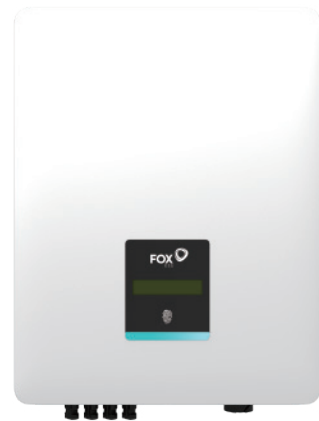

For more about the Fox ESS range of three-phase inverters, visit:

WWW.FOX-ESS.COM



TECHNICAL SPECIFICATIONS

MODEL	T3-G3	T4-G3	T5-G3	T6-G3	T8-G3	T10-G3	T12-G3	T15-G3	T17-G3	T20-G3	T23-G3	T25-G3
INPUT (PV)												
Max. Input Power[W]	4500	6000	7500	9000	12000	15000	18000	22500	25500	30000	34500	37500
Max. Input Voltage[V]	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
Start-up Input Voltage[V]	140	140	140	140	140	140	140	140	140	140	140	140
Rated Input Voltage[V]	600	600	600	600	600	600	600	600	600	600	600	600
MPPT Operating Voltage Range[V]	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000	140 ~ 1000
Max. Input Current[A]	14	14	14	14	14	14	14	28	28	28	28	28
Max. Short-circuit Current[A]	18.2	18.2	18.2	18.2	18.2	18.2	18.2	36.4	36.4	36.4	36.4	36.4
No. of Independent MPP Trackers	2	2	2	2	2	2	2	2	2	2	2	2
No. of Strings per MPP Tracker	1+1	1+1	1+1	1+1	1+1	1+1	1+1	2+2	2+2	2+2	2+2	2+2
OUTPUT (AC)												
Rated Output Power[W]	3000	4000	5000	6000	8000	10000	12000	15000	17000	20000	23000	25000
Max. Output Apparent Power[VA]	3300	4400	5500	6600	8800	11000	13200	16500	18700	22000	25300	27500
Rated Grid Voltage[V]	3/N/PE, 220/380, 230/400, 240/415											
Rated Grid Frequency[Hz]	50/60											
Rated Output Current[A]	4.3	5.8	7.2	8.7	11.6	14.5	17.4	21.7	24.6	29.0	33.3	36.2
Max. Output Current[A]	4.8	6.4	8.0	9.6	12.8	15.9	19.1	23.9	27.1	31.9	36.7	39.9
Power Factor	1 (Adjustable from 0.8 leading to 0.8 lagging)											
Total Harmonic Distortion [THDi] [%]	<3											
EFFICIENCY												
MPPT Efficiency [%]	99.8											
Euro Efficiency [%]	97.8											
Max. Efficiency [%]	98.6											
PROTECTION												
Insulation Monitoring	YES											
Residual Current Monitoring	YES											
PV String Current Monitoring	Yes						Optional					
DC Reverse Polarity Protection	YES											
Anti-islanding Protection	YES											
AC Short-circuit Protection	YES											
AC Overcurrent Protection	YES											
AC Overvoltage Protection	YES											
Surge Protection	DC/AC: Type II											
DC Switch	Optional											
AFCI	Optional											
GENERAL DATA												
Dimensions (WxHxD) [mm]	370*480*183.5											
Weight [kg]	17	17	17	17	17	17	17	20	20	20	21	21
Cooling Method	Natural Convection						Fan					
Topology	Transformerless											
Noise Emission (typical) [dB]	<30	<30	<30	<30	<30	<30	<30	<30	<55	<55	<55	<55
Max. Operating Altitude [m]	3000											
Operating Temperature Range [°C]	-25 ~ 60											
Humidity [%]	0 ~ 100 (No Condensation)											
Protection Degree	IP65											
Internal Consumption at Night [W]	<3											
Monitoring Module	WIFI / 4G (Optional)											
Communication	RS485, Meter, DRM, Estop											
Display	LCD, Touch Key, App, Website											
STANDARD COMPLIANCE (MORE AVAILABLE UPON REQUEST)												
Safety	EN 62109-1/2, BIS IS 16169, BIS IS 16221-1/2											
EMC	EN 61000-6-1/2/3/4											
Grid Regulation	AS/NZS-4777.2, C10/11, EN50549-1, PN EN-50549-1, VDE-AR- N4105, RD 1699, CEI 0-21, NB/T 32004, VDE V 0126-1-1, UTE C 15-712-1											